

Construction Hoist



ZOOMLION

افشین ماشین
تاور کریں۔ آسانسور کارنامی
۷-۸۸۱۵-۳۳۳۰۳۶۱۶

ZOOMLION

ZOOMLION HEAVY INDUSTRY SCIENCE & TECHNOLOGY CO.,LTD.
Add: No.677, Lugu Road, Zoomlion Industrial Park, Changsha, Hunan, China, 410205




Web: en.zoomlion.com

Email: tc_marketing@zoomlion.com

Copyright © 2022 Zoomlion. All rights reserved. Reproduction and copying of any part of contents is not allowed for any purposes without Zoomlion's approval.

■ Technical Specifications

Type	SC1000	SC200EB-A	SC200/200EB-A	SC200BZ-A	SC200/200BZ-A	SC200BG	SC200/200BG	
Config. code		4S2050	4S2050	4S2063	4S2063	BMM-35	BMM-35	
Features	Stainless steel cage High-efficiency transmission Failure Alarm Manual Lowering in emergency Emergency Lighting Status Inquiry	Comfortable and energy-saving High-efficiency transmission Closed-loop variable frequency control Anti-falling function Sliding prevention safety control Accurate automatic leveling		Moderate speed and smooth experience High-efficiency transmission Closed-loop variable frequency control Anti-falling function Sliding prevention safety control Accurate automatic leveling			Fastest high speed solution High-efficiency transmission Advanced hoist rope control Anti-falling function Sliding prevention safety control Accurate automatic leveling	
Quantity of cage	1	1	2	1	2	1	2	
Rated load (kg)	400 (2 persons)	2000 (24 persons)	2 × 2000 (24 persons per cage)	2000 (24 persons)	2 × 2000 (24 persons per cage)	2000 (24 persons)	2 × 2000 (24 persons per cage)	
Rated speed (m/min)	0-33	0-50	0-50	0-63	0-63	0-96	0-96	
Motor power (kW)	11	2 × 11/18.5(50/60Hz)	2 × 2 × 11/18.5(50/60Hz)	3 × 11/18.5(50/60Hz)	2 × 3 × 11/18.5(50/60Hz)	3 × 18.5	2 × 3 × 18.5	
Reduction gear ratio	1:16	1:18.98	1:18.98	1:13.47	1:13.47	1:11.4	1:11.4	
Converter (kW)	15	37	2 × 37	75	2 × 75	110	2 × 110	
Rated current (A)	24	2 × 36	2 × 2 × 36	3 × 36	2 × 3 × 36	3 × 55.9	2 × 3 × 55.9	
Power consumption (kW)	18	55	2 × 55	90	2 × 90	158	2 × 158	
Safety device type	SAJ30-1.2A	SAJ40-1.2A	SAJ40-1.2A	SAJ50-1.4	SAJ50-1.4	SAJ50-2.0	SAJ50-2.0	
Cage size (L × W × H, m)	1.0 × 1.0 × 2.2	3.2 × 1.5 × 2.2	3.2 × 1.5 × 2.2	3.2 × 1.5 × 2.2	3.2 × 1.5 × 2.2	3.2 × 1.5 × 2.2	3.2 × 1.5 × 2.2	
Size of mast section (L × W × H, mm)	650 × 200 × 1508	650 × 650 × 1508	650 × 650 × 1508	650 × 650 × 1508	650 × 650 × 1508	650 × 650 × 1508	650 × 650 × 1508	
Maximum lifting height (m)	500	200	200	350	350	500	500	

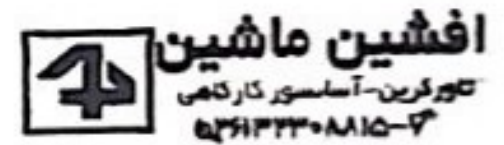

CONSTRUCTION HOIST

